


Multi-Purpose 1/8" Diameter Thermocouple

Temperature Tools™
1-800-TIP-TEMP



Email completed form to
EveryDegreeMatters@tiptemp.com

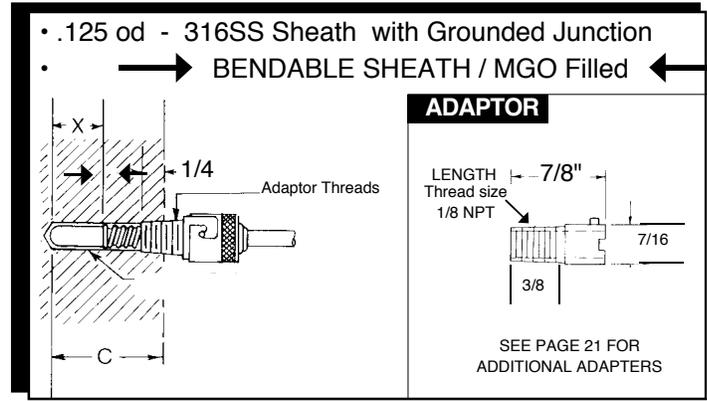

HOW TO ORDER

Select **OUTLINED** Text To Create Part Number

Select T/C Calibration	Select Connection Fitting	Select "A" Length	Select Cable Style Select "B" Length	Select Termination											
<p>+ Iron - Constantan</p> <p>J</p> <p>Black</p> <p>32 to 1400°F</p> <p>0 to 760°C</p>	<p>BCF</p> <p>Brass Compression Fitting</p> <p>1/8 NPT 1/8"</p> <p>Adjustable Brass Compression Fitting</p>	<p>Bendable MGO Filled 1/8" diameter 316 SS Sheath with Grounded Junction. Specify Sheath Length in Inches.</p> <p>1/8" Dia. 2 3/8" 3/8" od</p> <p>"A" Length "B" Length</p>	<p>Please Specify Teflon, FiberGlass, Armor Cable or Stainless Steel Overbraid Length with 2" stripped leads.</p> <p>2" Stripped Leads Standard. Options on page 9.</p>	<p>1 </p> <p>Large Plug</p>											
<p>+ Copper - Constantan</p> <p>T</p> <p>Blue</p> <p>-320 to 700°F</p> <p>-195 to 370°C</p>	<p>ABF</p> <p>Adjustable Bayonet Fitting</p> <p>← 2 3/8" → </p> <p>Adjustable Bayonet Fitting</p>			<p>"A" Length in Inches</p> <p>1 To 12"</p>	<p>ARCA - "B"</p> <p>Specify Length (Armor Cable)</p>	<p>2 </p> <p>Large Jack</p>									
<p>+Chromel - Constantan</p> <p>E</p> <p>Purple</p> <p>32 to 1600°F</p> <p>0 to 900°C</p>	<p>SCF</p> <p>Stainless Compression Fitting</p> <p>1/8 NPT 1/8"</p> <p>Adjustable "SS" Compression Fitting</p>	<p>Correction: to use the APC Style the customer must also buy the ABF-18</p>	<p>SSOB - "B"</p> <p>Specify Length (Stainless Steel Overbraid)</p>			<p>3 </p> <p>Mini Plug</p>									
<p>+ Chromel - Alumel</p> <p>K</p> <p>Yellow</p> <p>32 to 2300°F</p> <p>0 to 1260°C</p>	<p>APC - (Size)</p> <p>Adjustable Pipe Clamp</p> <table border="1"> <tr><th colspan="2">Pipe Clamp Sizes/Dia.</th></tr> <tr><td>3/4" to 1 1/2"</td><td>1</td></tr> <tr><td>1 5/8" to 2 1/2"</td><td>2</td></tr> <tr><td>2 5/8" to 3 1/2"</td><td>3</td></tr> <tr><td>3 1/2" to 4 1/2"</td><td>4</td></tr> <tr><td>4 1/2" to 5 1/2"</td><td>5</td></tr> </table> <p>APC * Specify code for size.</p>			Pipe Clamp Sizes/Dia.		3/4" to 1 1/2"	1	1 5/8" to 2 1/2"	2	2 5/8" to 3 1/2"	3	3 1/2" to 4 1/2"	4	4 1/2" to 5 1/2"	5
Pipe Clamp Sizes/Dia.															
3/4" to 1 1/2"	1														
1 5/8" to 2 1/2"	2														
2 5/8" to 3 1/2"	3														
3 1/2" to 4 1/2"	4														
4 1/2" to 5 1/2"	5														
		<p>GG - "B"</p> <p>Specify Length (Fiberglass wire 20ga. Solid)</p>	<p>5 </p> <p>T/C Alloy lugs</p>												
			<p>6 </p> <p>Standard Leads</p>												

Sample Part Number

TC44
Grounded Junction
Standard Style

CALIBRATION

Connection Fitting

"A" INCHES

"B" INCHES

TERMINATION

Quantity: _____ Notes:

Ordering Example: **TC44** = Bendable Thermocouple 1/8" dia. and 316 SS sheath, with Grounded Junction.

Calibration = Type "J" calibration, **APC3** = Adjustable Pipe Clamp (2 5/8" to 3 1/2" pipe diameter),

A inches" = (sheath length) 10 ", "B" inches = **ARCA-72** = 72" of Armor cable, Termination = 6 (stripped leads).